



Product Description: LBST024C (20.0 MHz ~ 24.0 GHz Bias-T)

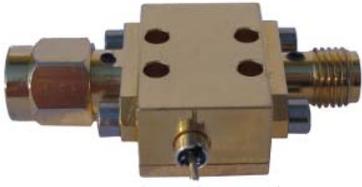

LiConn has developed super wide band Bias-T with low cost. The bias-T offers maximum 1.0 dB insertion loss and maximum 1.5:1 VSWR throughout 20MHz to 24GHz band.

The Bias-T can be used in varieties of circuitries such as wide band amplifiers, broadcast, and measurement. The bias-T is designed to meet MIL-STD-202g.

Key Performance

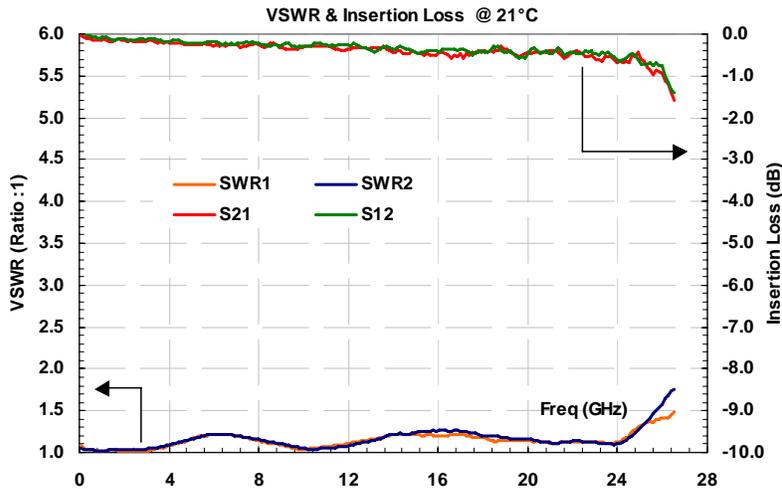

- 20.0 MHz ~ 24.0 GHz
- <1.5:1 VSWR
- < 1.0 dB Insertion Loss
- 40 dB RF/DC Isolation
- 50 Volts DC Voltage Rating
- SMA Connector I/O
- Miniature Size
- RoHS Compliant
- EAR99

Ordering Information


Model Number	RF+DC Port	RF Port
LBST024C-1	SMA Male	SMA Female
LBST024C-2	SMA Female	SMA Male
LBST024C-3	SMA Male	SMA Male
LBST024C-4	SMA Female	SMA Female

Absolute Maximum Ratings

Parameters	Units	Ratings
RF Average Power	W	20
Maximum DC Voltage Rating	V	-50 Min +50 Max
Maximum DC Current	mA	250
Operating Temperature	°C	-54 ~ +85
Storage Temperature	°C	-65 ~ 150

*Operation beyond any one of these parameters may cause permanent damage.

Outline

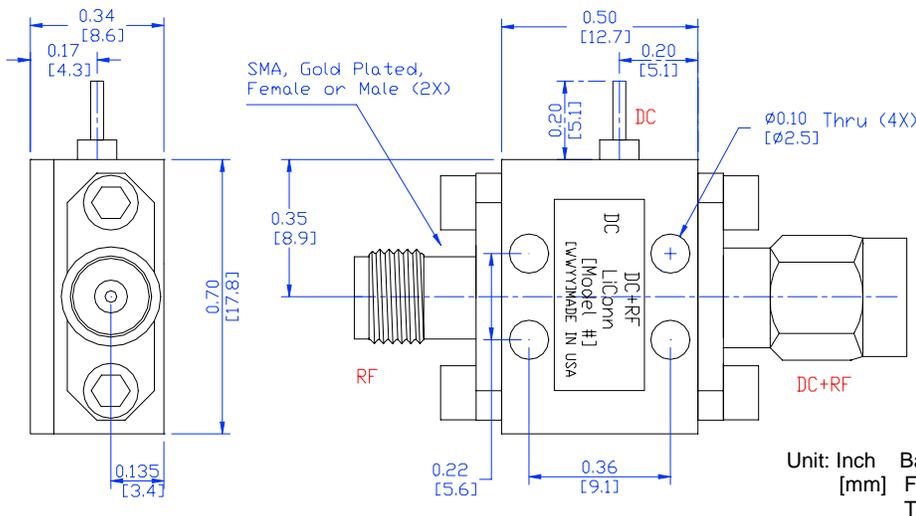

Unit: Inch [mm] Base Material: Brass
Finish: Gold Plating
Tolerance: X.XX ±0.01"